


Part Number: GHT1038
Metal Roller Shutter Door Magnetic Switch



Product Data Sheet

PRODUCT	DIMENSIONS
---------	------------

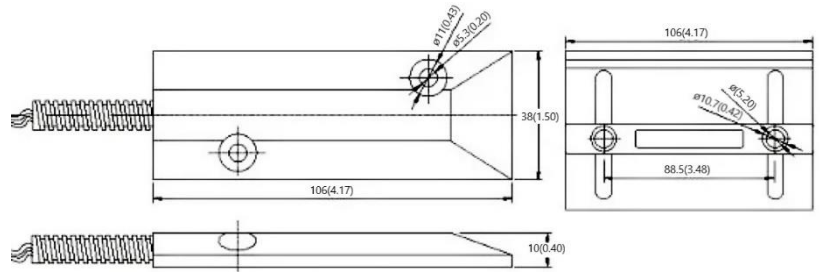


Drawings not to scale. All dimensions in mm (inches).

SPECIFICATION		
---------------	--	--

CONTACT FORM		Form A (Normally Open)
CONTACT MATERIAL		Rhodium
SWITCHING CAPACITY	Max.	10 W/VA
SWITCHING VOLTAGE	Max.	100 V ac/dc
SWITCHING CURRENT	Max.	0.2A
CARRYING CURRENT	Max.	0.5A
DIELECTRIC STRENGTH	Min.	150Vdc
CONTACT RESISTANCE	Max.	100m Ω
INSULATION RESISTANCE	Min.	10 ⁹ Ω
PULL-IN SENSITIVITY		10 – 35AT
DROP-OUT SENSITIVITY	Min.	DO/PI \geq 0.8AT
SWITCHING TIME WITHOUT BOUNCE	Max.	5 ms
BOUNCE TIME	Max.	0.2 ms
RELEASE TIME	Max.	0.05ms
RESONANT FREQUENCY	Typ.	5000Hz
OPERATING FREQUENCY	Max.	200Hz
VIBRATION	10-1000	20Hz
SHOCK		35G
CAPACITANCE	Typ.	0.7 pF
OPERATING TEMP. RANGE	Deg.	-40 +125 °C
TEST COIL	Type	1035

NOTE	ORDERING INFO
------	---------------

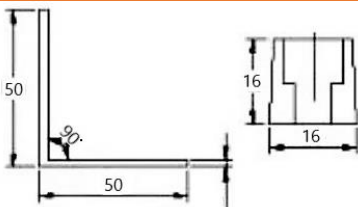

- Bracket 107 x 50 x 50mm
- Universal mounting with L bracket (optional)
- 350mm armored cable (stainless)

PART NUMBER GHT1038 10 35

- Type _____
- Minimum (AT) Sensitivity _____
- Maximum (AT) Sensitivity _____

Made in India