



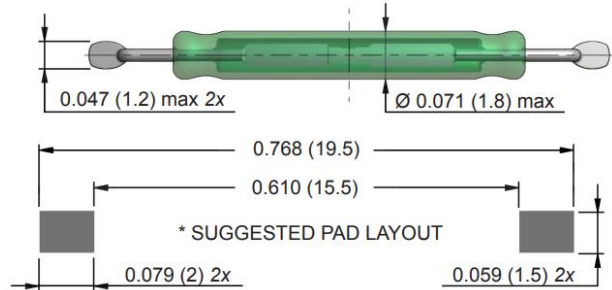

Part Number: GHT2515
 Reed Switches – SMD – Normally Open Contacts
 Product Data Sheet

PRODUCT	DIMENSIONS
---------	------------

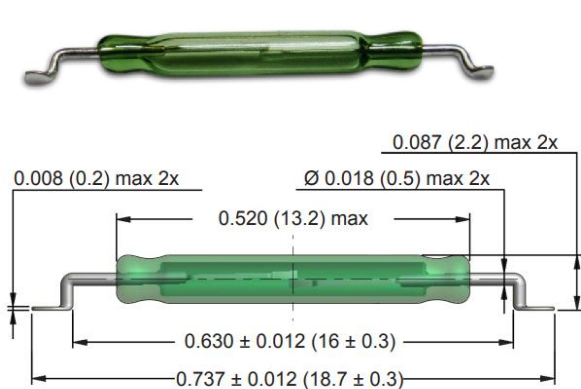

Drawings not to scale. All dimensions in inches (mm).

SPECIFICATION		
CONTACT FORM		Form A (Normally Open)
CONTACT MATERIAL		Rhodium
SWITCHING CAPACITY	Max.	10 W/VA
SWITCHING VOLTAGE	Max.	100 V ac/dc
SWITCHING CURRENT	Max.	0.5 A
CARRYING CURRENT	Max.	1.0 A
DIELECTRIC STRENGTH	Min.	150Vdc
CONTACT RESISTANCE	Max.	100mΩ
INSULATION RESISTANCE	Min.	10 ⁹ Ω
PULL-IN SENSITIVITY		10 – 35AT
DROP-OUT SENSITIVITY	Min.	DO/PI 0.8AT
SWITCHING TIME WITHOUT BOUNCE	Max.	5 ms
BOUNCE TIME	Max.	0.2 ms
RELEASE TIME	Max.	0.05ms
RESONANT FREQUENCY	Typ.	5000Hz
OPERATING FREQUENCY	Max.	200Hz
VIBRATION	10-1000	20Hz
SHOCK		35G
CAPACITANCE	Typ.	0.7 pF
OPERATING TEMP. RANGE	Deg.	-40 +125 °C
TEST COIL	Type	1035

NOTE	ORDERING INFO
------	---------------

We can supply custom cut and formed switches

PART NUMBER GHT2515 10 35

When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (.118) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.

- Type
- Minimum (AT) Sensitivity
- Maximum (AT) Sensitivity

Made in India